

Alfa Laval CH 900

Modularized disc stack separation system för industrial use

Introduction

The use of separators in different chemical applications goes back to the beginning of the 1900s. Based on the long-term cooperation with various chemical industries, Alfa Laval separators are specially designed for the requirements and demands of this industry.

Application

CH 900 system is designed and optimized for:

- Petrochemical
- Minerals
- Pulp and paper
- Green chemical applications
- Pharmaceuticals

Benefits

- High separation efficiency
- No gas flashing inside centrifuge
- No air entrainment
- Small footprint easy to install and start up
- Gentle treatment of the process liquid
- Low power consumption
- Complete system handling both process and utility requirements
- Flexible installation possibilities
- Robust and reliable design

Design

The system consists of a 18-size separator, a process valve module with valves and components for routing of product and a service liquid modules for utilities in and out from the separator, as well as control and starter cabinet.

All metallic parts in contact with the process liquid are made of stainless steel. Gaskets and seals in contact with the product are made of PTFE/Graphite material.

The separation system is prepared for completely automated Cleaning in Place (CIP).

Available in following executions:

- Solid-liquid separation
- Liquid-liquid separation
- Liquid-liquid-solid separation

Available for installation in safe area, zone 2 and zone 1.



Scope of supply

- Disc stack separator with process liquid module
- Main process valves of type ball valve
- Automatic counter pressure valve
- Flow meter of volumetric type
- Main motor starter with VFD
- Control panel with PLC and HMI

Options


- Solids receiving unit:
 - Consists of a collection device and a pump to remove discharged solids (only for safe area and zone 2 installations)
- Factory Acceptance Test
- UL or CSA versions available on request

Working principle

The product enters and leaves the separator via the valve module. The flow rate and the counter pressure in the outlet of the separator are controlled by the process and service liquid module.

Discharge of solids from the separator bowl is triggered either by a timer or a manual control. The discharged solids are pumped away by the optional solids receiving unit.

The valve module also controls the utility liquids for the separator's discharge system and for flushing and CIP as well as an inert gas system for installation in zone 1.

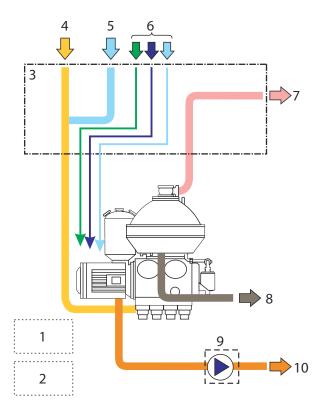


- 1. Control cabinet
- 2. Main motor starter and VFD
- 3. Process and service liquid module
- 4. Product inlet
- 5. Standby/Safety water
- 6. Utilities
- 7. Outlet(s) of product(s)
- 8. Drain for separator
- 9. Solids receiving unit
- 10. Outlet of discharged solids

Technical data

Performance data	
Hydraulic capacity ¹	100 000 l/h (440,3 US gpm)
Maximum motor power	67 kW (89,8 HP)


¹ Actual capacities depend on operating conditions

Connections	
Inlet	DN80 ASME B16.5/DIN EN 1092-1
iiiet	Flange
Outlet	DN80 ASME B16.5/DIN EN 1092-1
	Flange
Material data	
Piping	ISO 1127 AISI 316L
Customer connection	ANSI B16,5/DIN EN 1092-1 Flange
Gaskets in system	PTFE / Graphite product wetted parts
Pipe frame	AISI 304
Weights data (approximate)	
System weight incl. bowl and motor	3190 kg (7032 lbs)
Bowl weight	1200 kg (2645 lbs) 1200 kg (2645 lbs)

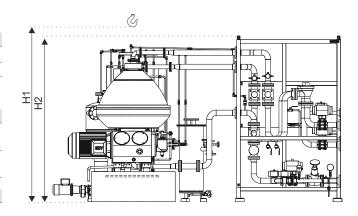

Dimensions	
H1 (min. lifting height)	3400 mm (11 ft 1 7/8 inch)
H2	2750 mm (9 ft 1/4 inch)
W1	4545 mm (14 ft 10 15/16 inch)
W2	3008 mm (9 ft 10 7/16 inch)

Dimensional drawing

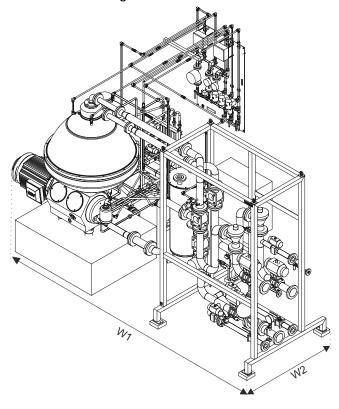

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200000598-1-EN-GB © Alfa Laval Corporate AB